OFF ROAD

Power Units

F36

F36


75 kW (102 HP) @ 2200 rpm

Stage V

SPECIFICATIONS

No. of cylinders / valves		4L / 4
Injection System		COMMON RAIL 1800 bar
Turbocharger		WG
Displacement	liters	3.6
Bore x Stroke	millimeters	102 x 110
Max power	kW (HP) @ rpm	75 (102) @ 2200
Max Torque	Nm @ rpm	430 @ 1400
ATS		Compact HI-eSCR2
Certification		Stage V


POWER & TORQUE

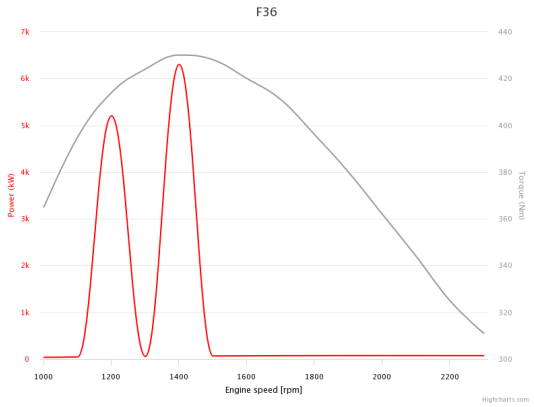

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1199 x 758 x 1376
Dry Weight	Kg	420

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more? CONTACT US

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)

TC (Turbocharged)

NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)

VGT (Variable Geometry Turbocharger)

TST (Twin Stage Turbocharge)

Exhaust System

EGR (Exhaust Gas Recirculation)

SCR (Selective Catalytic Reduction)

DOC (Diesel Oxidation Catalyst)

DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE